


Double Glazed

Fixed Industrial Skylights



Polycarbonate Dome

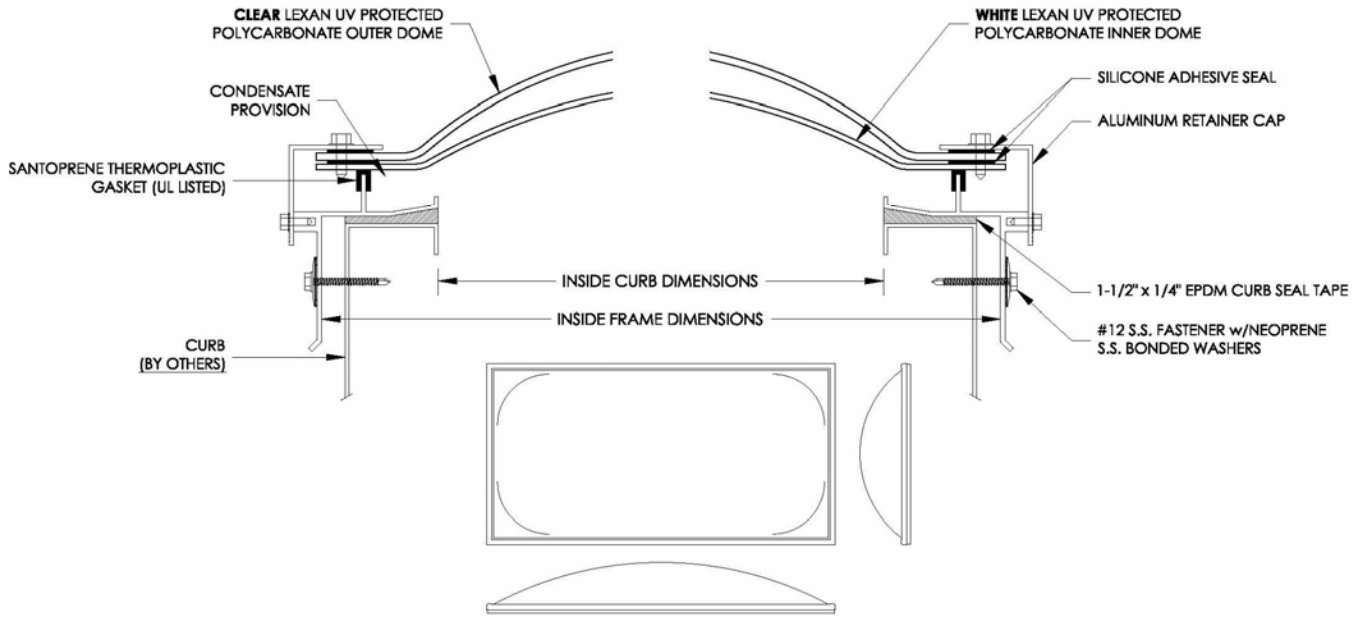

Standard Sizes

Call-Out Size*	Model Number / Inside Curb Dimensions	Net I.D. Clear Frame	Options:
4040	4848	52 1/4" x 52 1/4"	1. Painted Frames
5060	6072	64 1/4" x 76 1/4"	2. Security Grills
4080	4896	52 1/4" x 100 1/4"	3. Safety Screens
			4. Curbs

*Many other sizes available

Solar Heat Gain Coefficient = .54, U Factor = .55, Visible Light Transmission = 50% (Typical for double glazed units)

Specifications

- Skylights shall be Baylight (curb mounted) by Bay Insulation, 2929 Walker Drive, Green Bay, WI 54311
- The skylight shall be fully factory assembled consisting of polycarbonate domes with a CC-1 classification that is sealed by interior and exterior gaskets to a 6063-T5 heliarc welded aluminum frame fabricated of aluminum. The frame is to have an integral condensation channel. The aluminum retaining cap fasteners are to be corrosive resistant.
- Skylights shall be double glazed using Lexan UV Protected Polycarbonate in a Bubble configuration.
- Skylight fasteners shall be #12 x 2" SMS spaced 12" O.C.
- Miami Dade County NOA# 10-0216-02
- Florida Building Code FL 14006
- Materials tested in conformance with FM 4431 including 2" severe hail test.

Baylight™
Prismatic
Skylights

Bay Insulation Systems
2929 Walker Drive
Green Bay, WI 54311
800/442-8464

There is Nothing Greener Than Off™

Bay Insulation Systems Inc.
5305 Hollins Road
Roanoke, VA 24019
866/467-5247

Bay Insulation Systems Inc.
111 West McCarty Lane
San Marcos, TX 78666
866/512-6790

Bay Insulation Systems Inc.
4545 Emanuel Cleaver II Blvd.
Kansas City, MO 64130
800/225-8892